


T/RH Mini anti-theft wall mounting kit

The mounting kit for the Aranet T/RH Mini sensor provides theft prevention. It includes screws and wall anchors that securely fasten the device, allowing it to be removed only with a tamper-resistant Torx (TT10) security screwdriver.

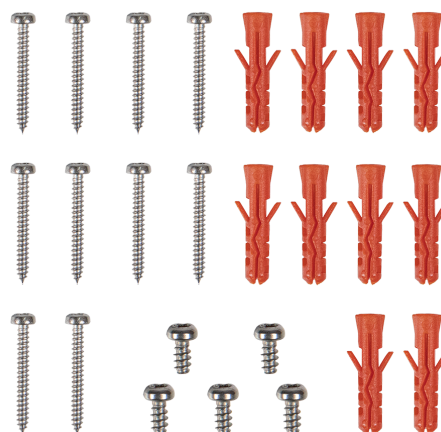

Product numbers

Globally	TDAPWM02.005
----------	--------------

Compatible product

Aranet T/RH Mini	TDSPT101, TDSPT1U1
------------------	--------------------

Kit contents

Component	Amount included in the kit	Required for mounting one T/RH Mini
4×20 mm nylon wall anchor	10	2
2.2×19 mm PZ self-tapping screw	10	2
3×6 mm TT10 security screw	5	1

- As suggested by the quantity of included hardware, this kit is sufficient for mounting five separate T/RH Mini devices.

General specifications

Packaging type	Resealable polyethylene bag	
Packaging size	100×70 mm	3.9×2.8 in
Weight	20 g	0.7 oz

Using the anti-theft wall mounting kit

1. Use the sensor's bottom cover as a template to mark the positions on the wall for drilling.
2. Drill two holes with a 4 mm (5/32 in) diameter and a depth of 30 mm (1.2 in) at the marked points.
3. Insert the provided nylon wall anchors into the drilled holes.
4. Align the bottom cover of the sensor with the wall and fasten it using the PZ self-tapping screws, ensuring they go through the cover's openings into the anchors.
5. Before fully tightening the screws, adjust the vertical alignment of the cover by pivoting it around the top screw. The bottom opening allows for side-to-side adjustment.
6. Attach the sensor body to the securely mounted cover.
7. Finally, secure the sensor by inserting the TT10 security screw into the bottom of the sensor body.

