
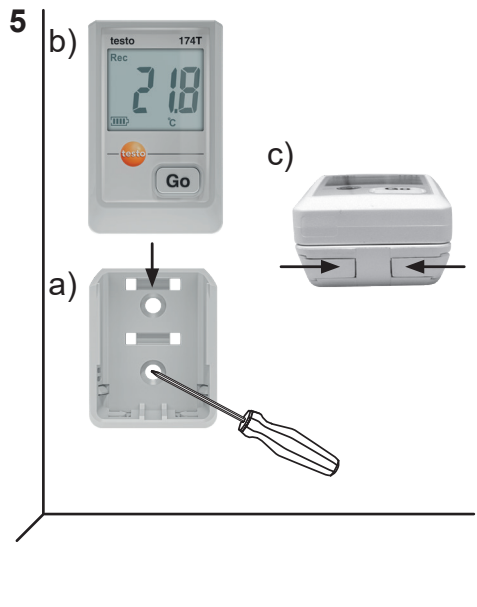
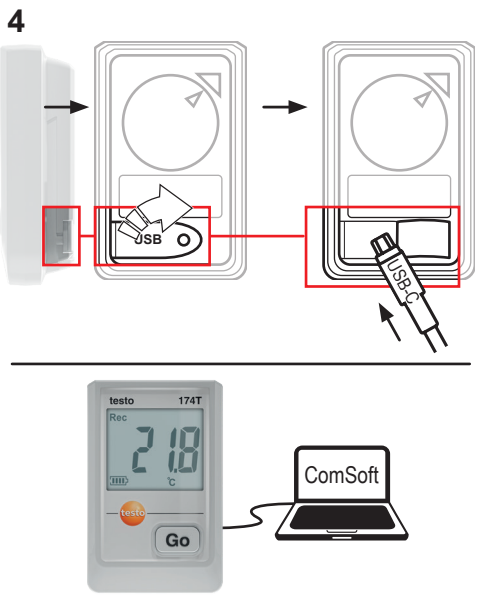
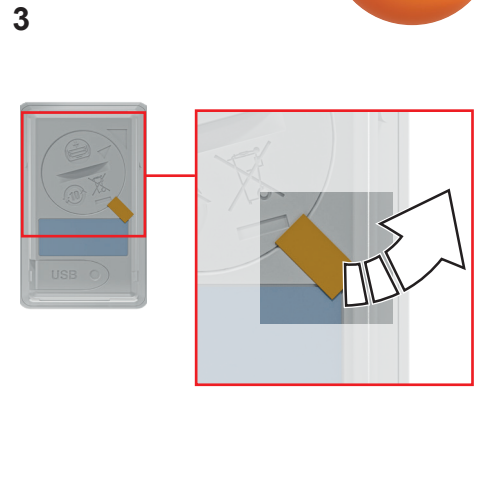


# testo 174T/testo 174H

0572 1740 01 / 0572 1741 01

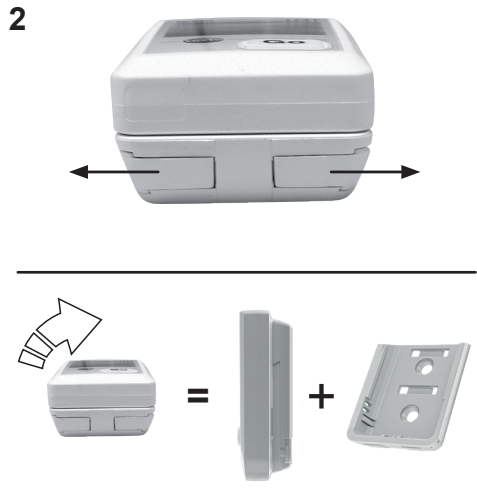

6

[www.testo.com/manuals](http://www.testo.com/manuals)

[www.testo.com/comsoft-basic/p/0572-0580](http://www.testo.com/comsoft-basic/p/0572-0580)


[www.testo.com/comsoft-professional/p/0554-1704](http://www.testo.com/comsoft-professional/p/0554-1704)












<p>60 x 38 x 19 mm 2.4 x 1.5 x 0.7 in</p>	<p>testo 174T: -30...+70 °C -22...+158 °F</p> <p>testo 174H: -20...+70 °C -4...+158 °F</p> <p>-40...+70 °C -40...+158 °F</p>	<p>2x 3 V (CR 2032 Lithium)</p> <p>testo 174T: 500 days (15 min meas. cycle, +25 °C/77 °F)</p> <p>testo 174H: 1 year (15 min meas. cycle, +25 °C/77 °F)</p>	<p>testo 174T: 0.1 °C 0.1 °F</p> <p>testo 174H: 0.1 °C 0.1 °F 0.1 % RH</p>	<p>testo 174T: -30...+70 °C -22...+158 °F</p> <p>testo 174H: -20...+70 °C -4...+158 °F 0...100 % RH</p>	<p>testo 174T: ± 0.5 °C (-30...+70 °C) ± 0.5 °F (-22...+158 °F)</p> <p>testo 174H: ± 0.5 °C (-20...+70 °C) ± 0.5 °F (4...+158 °F) ± 3% RH (2% RH... 98% RH) @ 25 °C ± 0.03 % RH/K ± 1 digit</p>	<p>35 g 1.2 oz</p> <p>testo 174T: IP 65</p> <p>testo 174H: IP 20</p>

## Approval and Certification

<b>Product</b>	testo 174T testo 174H
<b>Model</b>	0572 1740 0572 1741
<b>Mat.-No.</b>	0572 1740 01 0572 1741 01
<b>Date</b>	20.10.2025

 The use of the wireless module is subject to the regulations and stipulations of the respective country of use, and the module may only be used in countries for which a country certification has been granted. The user and every owner has the obligation to adhere to these regulations and prerequisites for use, and acknowledges that the re-sale, export, import etc. in particular in countries without wireless permits, is his responsibility.

Country	Comments
<b>Argentina</b>	Approved
<b>Australia &amp; New Zealand</b>	 E 1561 80007249603
<b>Brazil</b>	Approved
<b>Canada</b>	See IC Warnings
<b>Chile</b>	Approved
<b>China</b>	Approved
<b>Europa + EFTA</b>	  Hereby, Testo SE & Co. KGaA declares that the radio equipment types testo 174T (0572 1740) and testo 174H (0572 1741) are in compliance with Directive 2014/30/EU. The full text of the EU declaration of conformity is available at the following internet address: <a href="https://www.testo.com/eu-conformity">https://www.testo.com/eu-conformity</a> <b>EU countries:</b> Belgium (BE), Bulgaria (BG), Denmark (DK), Germany (DE), Estonia (EE), Finland (FI), France (FR), Greece (GR), Ireland (IE), Italy (IT), Latvia (LV), Lithuania (LT), Luxembourg (LU), Malta (MT), Netherlands (NL), Austria (AT), Poland (PL), Portugal (PT), Romania (RO), Sweden (SE), Slovakia (SK), Slovenia (SI), Spain (ES), Czech Republic (CZ), Hungary (HU), Republic of Cyprus (CY). <b>EFTA countries:</b> Iceland, Liechtenstein, Norway, Switzerland  WEEE Reg. no.: DE 75334352 
<b>India</b>	Approved
<b>Japan</b>	Approved
<b>Jordan</b>	Approved
<b>Malaysia</b>	Approved
<b>Philippines</b>	Approved
<b>South Africa</b>	Approved
<b>South Korea</b>	Approved
<b>Thailand</b>	Approved
<b>Türkiye</b>	Approved
<b>United Arab Emirates</b>	Approved
<b>United Kingdom (UK)</b>	  The UK Declaration of Conformity can be found on the testo homepage <a href="http://www.testo.com">www.testo.com</a> under the product specific downloads.
<b>USA</b>	 See FCC Warnings

	Comments
<b>Hongkong</b>	Approved
<b>Taiwan</b>	Approved
<b>NSF</b>	For testo 174T: 
<b>EN12830</b>	For testo 174T: Acc. to EN12830-S, T, 0,5 Ia

## IC Warnings

### CAN ICES-003(B)/NMB-003(B)

This Class B digital apparatus complies with Canadian ICES-003.

Cet appareil numérique de la classe B est conforme à la norme NMB-003 du Canada.

### Co-Location

This device must not be co-located or operated in conjunction with any other antenna or transmitter.

### Co-location

Ce dispositif ne doit pas être utilisé à proximité d'une autre antenne ou d'un autre émetteur.

## FCC Warnings

Information from the FCC (Federal Communications Commission)

### For your own safety

Shielded cables should be used for a composite interface. This is to ensure continued protection against radio frequency interference.

### FCC warning statement

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

### Caution

Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

### Warning

This device complies with Part 15 of the FCC Rules.

Operation is subject to the following two conditions:

- (1) this device may not cause harmful interference, and
- (2) this device must accept any interference received, including interference that may cause undesired operation.

### Co-Location

This device must not be co-located or operated in conjunction with any other antenna or transmitter.

## Manufacturer/ importer

Testo SE & Co. KGaA

Celsiusstr. 2, 79822 Titisee-Neustadt, Germany

[www.testo.com](http://www.testo.com)

Warning: Please follow the instructions when using the product.